

Specifications

Specifications

Concentration Ranges (Auto-ranging)	0-0.5, 0-1, 0-10 0-65 mg/m ³
Laser Sensitivity	670 nm, 5 mW
Sample Period	0.001mg/m ³
Sample Flow Rate	1 sec
Pump Type	2 LPM
Accuracy	Diaphragm 10,000 hr
Precision	8% of NIOSH 0600
Particle Size Sensitivity Range	0.003 mg/m ³ or 2% reading
Long term Stability	0.1-100 micron
Sensor Type	5% reading
Average Period	Forward Light Scatter
Display	1 – 60 minutes
Internal Battery (Optional)	4X20 LCD
Power Consumption	12 VDC 12 Amp-Hr, lead acid
Internal Battery Operation, no heater with heater	350mA (no heater) 1.1 A (w/heater)
Battery Type	>30 Hours
Size	10 Hours
Lead Acid	(267) X 9.25
MOI Service Period	(235) X 5.7 (145) inches (mm)
Programmable Auto-Zero	2 yrs
Programmable Auto-Span	15min to 24 hours
Traceable Testing	15min to 24 hours
Sample Line Heater	Gravimetric
Outputs	Configurable RH Controlled
Data Storage Capacity	Analog 0-1,0-2.5, 0-5VDC, RS232
Temperature Compensation	12000 Records
Temperature Range	Standard
RH Measurement	0°C to +50°C
Ambient Temperature	Internal
Ambient Pressure	-30°C to +50°C
Alarm	1040 to 600 mbars
Available Cut Points	Contact Closure
	TSP, PM10, PM2.5, PM1




Standard Equipment

Universal Voltage Power Supply
Battery Charger Internal
47 mm Filter Holder
Comet Software
TSP Inlet
Inlet Heater
Digital Output Cable
Instruction Manual

Options

PM10, PM2.5, PM1 Sharp-Cut Cyclone
Low Temperature Option, -40°C to +50°C
Extra 47 mm Filter Holders
Aluminum Tripod
MicroMet Software
Radio Modem
Phone Modem
Satellite
Wind Speed/Direction Sensor
Ambient RH
External Battery Cable
Battery

E-SAMPLER™

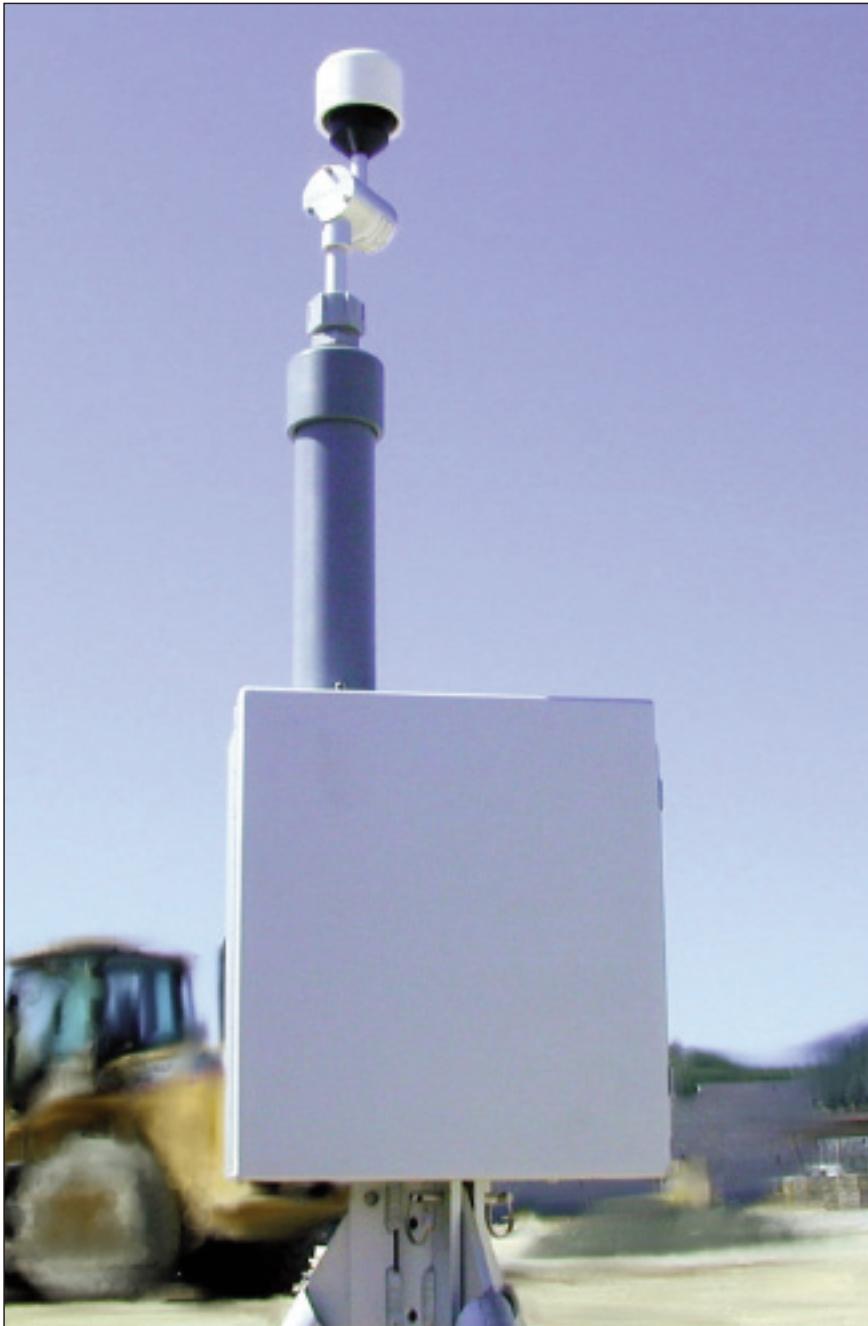

The New Standard in Real-Time Aerosol Monitoring

The E-SAMPLER is the most feature-packed light-scatter Aerosol Monitor available. Whatever your monitoring needs, the E-sampler will provide accurate, dependable and relevant data.

Features

- Programmable Auto-Zero
- Programmable Auto-Span
- Auto-ranging (1 to 65000 µm/m³)
- Automatic Flow Control Protocol
- Internal Battery (30 Hours Operation without heater & 10 Hours with heater.)
- Laser-Diode Precise Optical Engine
- Integral 47mm Analysis Filter
- Ambient Pressure and Temperature
- Internal Datalogger
- PM₁₀, PM_{2.5}, PM₁, TSP Monitoring
- Aluminum Weatherproof Enclosure
- Purge-Air protected Optics
- Completely Self-Contained
- No Tools Filter Replacement

Applications

- Ambient Air Monitoring
- Remediation Site Perimeter Monitoring
- Indoor Air Quality Monitoring
- Source Monitoring
- Visibility Monitoring
- Mobile Monitoring



Met One Instruments, Inc.

Sales & Service: 1600 Washington Boulevard, Grants Pass, Oregon 97526 • Tel 541/471-7111, Fax 541/471-7116

Regional Sales & Service: 3206 Main Street, Suite 106, Rowlett, Texas 75088 • Tel 972/412-4747, Fax 972/412-4716

<http://www.metone.com>

Met One Instruments, Inc.


E-SAMPLER

► Dual Technology

The E-SAMPLER is a dual technology instrument that combines the unequalled real-time measurement of light scatter with the accuracy standard of filter methods. The simple filter loading process testifies to the seamless blending of both technologies. Filters can be extracted and replaced in less than one minute and filter medium can be selected based on laboratory analysis. Particulate loading on the filter does not reduce performance due to the Met One actual flow control protocol. Ambient temperature and pressure are measured and actual flow is calculated and controlled by the E-SAMPLER microprocessor independent of filter loading change.



aerosol

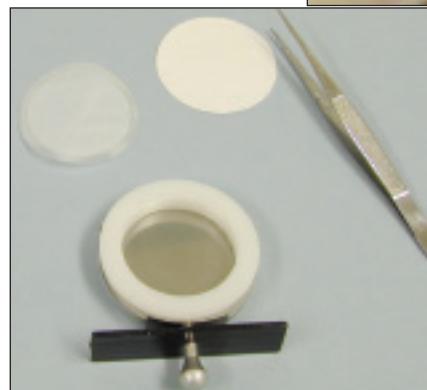

monitoring

► Principle

The E-SAMPLER provides real-time particulate measurement through near-forward light scattering. An internal rotary vane pump draws air at 2 LPM into the sensing chamber where it passes through visible laser light. Aerosols in the air scatter light in proportion to the particulate load in the air. Scattered light is collected by precise glass optics and focused on a PIN diode. Rugged state of the art electronics measure the intensity of the focused light and output a signal to the CPU. The output is linear to concentrations greater than 65,000 ug/m³. Every E-SAMPLER is factory

calibrated using polystyrene latex spheres of known index of refraction and diameter at multiple points to validate linearity.

► Maintenance

Each E-SAMPLER has two internal filters (not the 47mm Analysis Filter) to protect sensitive optics and prevent damage to the flow components. Both filters are accessible from



the front panel. Coin slots enable these filters to be removed and checked or replaced without any tools. Filter life for both will exceed 1 year in the harshest of conditions. All E-SAMPLERS have purge air from the internal filters that continually curtain the optics. This purge air protection allows the E-SAMPLER to be

continuous



used in adverse environments without performance degradation. Even in harsh conditions the E-SAMPLER will operate to specifications for 2 years without need of recalibration.

► Operation

The E-SAMPLER is rugged, portable and easy to use. The all aluminum enclosure is not only rugged but provides electronic stability by filtering potential RF interference. Set-up is a snap with the quick connect system which works with the EX-905 tripod. For other mounting applications, holes are provided to fasten to any structure. Simply turning the monitor on will start a sample using the most recent parameters. The unit will continue to operate until user intervention or battery failure. Auto-Zero and Auto-Span ensure that the data collected will be of the highest quality. Both Zero and Span can be operated manually or individu-



reporting tool. This software supports modem, radio, direct connection and generates summary reports as well as recordings and charts. Comet software included which provides easy to use terminal access to E-Sampler data.



ally programmed at varying time bases (15 minutes to 24 hours). The E-SAMPLER can also be configured for start/stop times, recording periods, averaging time and other parameters.

Data Collection and Software

Optional MicroMet Plus is a complete communications, data collection and data

