

GAS-1031

Carbon Dioxide Analyzer

The Met One Instruments GAS-1031 carbon dioxide (CO₂) analyzer uses non-dispersive infrared (IR) gas correlation spectroscopy to provide accurate, stable, and repeatable measurements of gaseous CO₂.

It can be configured to operate in absolute or differential mode providing flexibility within the analyser, making it well suited for ambient CO₂ measurements in addition to applications such as dilution extractive stack monitoring.

Approvals

Based on the GAS-1030 which has the following approvals:

- US EPA approval (RFCA-0509-174)


Benefits

The Met One range of analyzers have been designed using experience and knowledge gained from operating large air quality monitoring networks for more than 40 years. The result is instruments that integrate seamlessly into continuous monitoring networks.

- Guaranteed performance with a 2 year warranty
- Superior remote instrument control, diagnostic viewing & calibration minimize on-site maintenance requirements
- Comprehensive data logging & remote viewing of over 200 operational parameters
- Versatile interfacing through RS232, USB, Bluetooth, analog & digital I/O & optional TCP/IP
- Easier setup through an intuitive menu system with 'Quick Menu', advanced GUI & a large keypad with tactile keys
- Instant display of operational status using illuminated traffic lights on the front panel
- Removable flash memory stores 10 years of data, including up to 12 individual parameters and event logs. Operational parameters can also be transferred to memory for easy retrieval
- Install latest firmware updates via the USB flash memory drive
- Easily program, view, download & email data using Bluetooth connectivity combined with Android App
- 12 VDC internal voltages for enhanced operator safety
- Standard components across the Met One gas analyzer range reduces the cost of spare parts, accessories & consumables
- Rack slide design makes accessing internal components & removing the analyzer from a rack cabinet easy
- Choose either an external sample pump suitable for use by multiple analyzers or the optional low power internal pump for greater sample versatility
- Lower power demand & ability to operate over a wide temperature range reduce AQMS power usage.

Specifications

Range:	0 – 3000 ppm (autoranging)
Concentration display:	User selectable mg/m ³ , µg/m ³ ppm & ppb
Noise:	0.1 ppm
Lower detectable limit:	0.2 ppm (200 ppb), with Kalman filter active
Linearity:	< 1 % of full scale
Precision:	0.2 ppm or 0.5 % of reading whichever is greater
Zero drift:	24 hours: < 1 ppm
Span drift:	7 days: < 0.5 % of reading or 1 ppm whichever is greater
Response time:	60 seconds to 95 %
STP reference:	0 °C, 20 °C, 25 °C at 101.3 kPa
Sample flow rate:	1000 cc/min
Temperature range:	0 to 40 °C
Power:	100 – 240 VAC, 50 – 60 Hz (autoranging)
Power consumption:	190 W max (typical at start-up) 150 VA after warm-up
Dimensions:	429 x 175 x 638 mm (W X H X L)
Rack Spacing:	4 RU
Weight:	21.3 kg

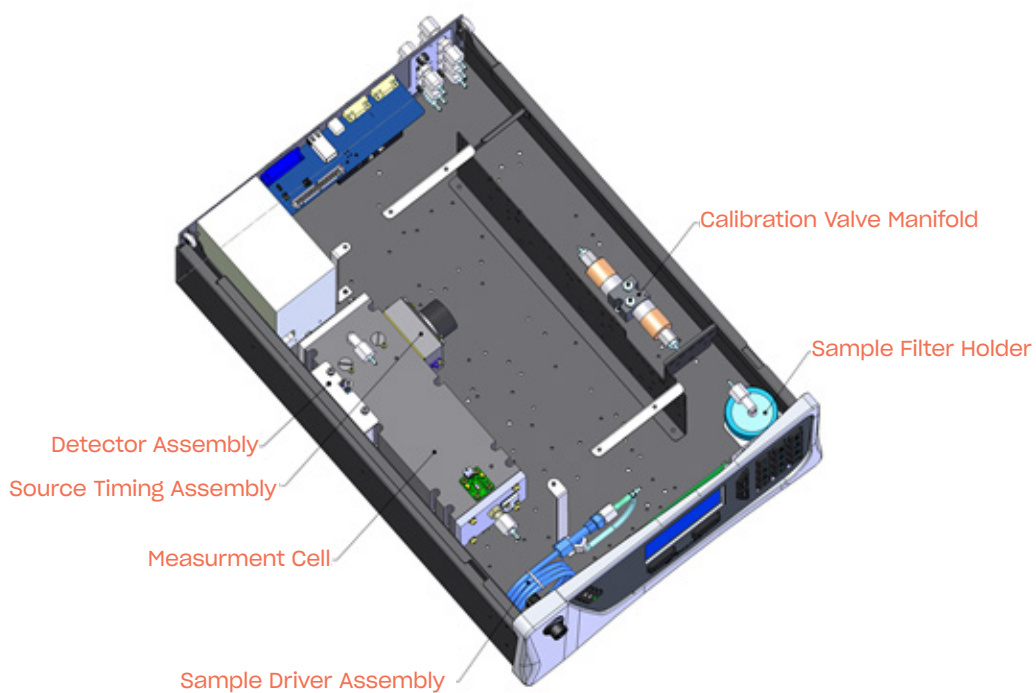

Communication

- RS232 Port 1: Digital communication
- RS232 Port 2: Multidrop port
- USB port (digital communication)
- Bluetooth (digital communication via Android App)
- TCP/IP Ethernet network connection (optional)
- Protocols: Modbus RTU/TCP, Bayern-Hessen, EC9800, Advanced.

Inputs & outputs

- 3 x analog outputs, menu selectable, current or voltage
- Menu selectable current output of 0 – 20 mA, 2 – 20 mA or 4 – 20 mA
- Voltage output of 0 – 5 V, with menu selectable zero offset of 0 V, 0.25 V or 0.5 V
- Voltage output of 0 – 10 V configured using jumpers (JP3) on rear panel PCA
- Autoranging from 0 – 50 ppb to 0 – 3000 ppm (between 2 user specified full scale values)
- 3 x analog inputs (scalable), 0 – 5 V, 16 bit resolution
- 8 x logic level digital control inputs
- 8 x open collector digital status outputs.

Data logging

Removable USB flash memory drive that stores data in the following formats:

- Instantaneous data from: 1, 3, 5, 10, 30, or 60 minute intervals & 2, 5, 10, 30 seconds
- Average data from: 1, 3, 5, 10, 15, 30 minutes, 1, 4, 8, 12, or 24 hours
- Data storage of 10 years of 12 parameters, 1 minute data on 8 GB memory.

Options & accessories

- Extended measurement ranges
- External AC powered pump (capable of operating 3 analysers, excluding NO_x)
- Internal long life, low power maintenance-free pump (Max 6 watts)
- Dual filter (particulate)
- High pressure zero/span valves
- Rack slides
- TCP/IP network port
- Printed manual (electronic manual supplied).



**Met One
Instruments**

POWERED BY ACOEM

Specifications subject to change without notice. Images used are for illustrative purposes only. All trademarks and registered trademarks are the property of their respective owners.

© 2022 Acoem and all related entities. All rights reserved. 20220711

metone.com